



MASSEY FERGUSON



# MF 1526

24.8 HP | COMPACT TRACTOR

**BIG TRACTOR ATTITUDE.  
COMPACT PACKAGE.**





# MF 1526

ALL ABOUT  
**HARD WORK.**

THE MASSEY FERGUSON® 1526 IS BUILT ESPECIALLY FOR A GENERATION OF LANDOWNERS AND HOBBY FARMERS WHO WANT A TRACTOR THAT'S AS HARDWORKING AND NO-NONSENSE AS THEY ARE.






|   |   |
|---|---|
| You Can Do More With This Tractor ..... | 4 |
| Parts & Service .....                   | 6 |
| Technical Specifications.....           | 7 |



YOU CAN DO MORE  
WITH THIS TRACTOR.  
**BECAUSE IT'S MADE  
TO HANDLE MORE.**





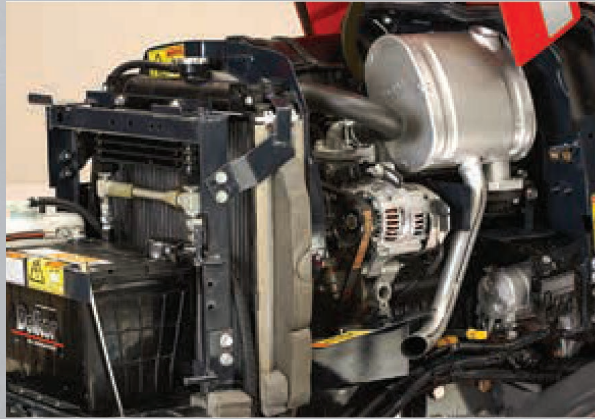

## STRAIGHTFORWARD

The work you do is hard. Driving your tractor is supposed to be the easy part.

- » **ELECTROHYDRAULIC PTO CLUTCH** — The electrohydraulic clutch features push-button control, so you can engage or disengage both on the go — no clutching, no reaching for levers.
- » **TRANSMISSION (HST WITH CRUISE CONTROL)** — A 3-range hydrostatic transmission with intuitive operation means faster range-gear selection, while separate forward and reverse foot pedals on the uncluttered platform give precise control of speed and direction.
- » **OPERATOR STATION** — The semi-flat platform gives you more legroom and makes entering and exiting the operator station easier.
- » **DUAL HYDROSTATIC CONTROL PEDALS** — Pedals are positioned to provide a more natural seating position during directional changes.
- » **BRAKE LOCATION** — The brake pedal has been moved to the left side of the platform for quicker use of the steering brake, allowing you to work more efficiently.
- » **INSTRUMENT PANEL** — Features a straightforward design that lets you read all tractor functions with a quick glance.

## DEPENDABLE

You want a stable tractor that lets you work harder and do more. We get that.

- » **FRAME** — A larger frame than other models in its category gives more stability and allows for more confident operation in numerous applications.
- » **STURDY** — Compare the tractor weight of the MF 1526 with that of the competition; this tractor has an excellent power-to-weight ratio.

## ACCESSIBLE

Truly a versatile workhorse — only better.

- » **MID PTO** — A rear and mid PTO give you more versatility. The rear PTO and mid PTO levers allow for independent or simultaneous operation of both drives.
- » **LOADER** — Attaching the bucket and changing it is simple. The FLx2106 comes standard with a skid steer tool carrier.





## PARTS & SERVICE

# IT'S ALL ABOUT A LIFETIME OF SUPPORT.

Buying, owning and maintaining equipment can be complex. That's why ensuring you have support and peace of mind is always an important consideration. With Massey Ferguson and Hesston by Massey Ferguson, you can count on personalized, responsive support from our network of dealers. Plus, there's no cutoff time for parts and service, meaning we're available to you throughout the lifetime of your machine.



BUY PARTS ONLINE TODAY AT  
[parts.agcocorp.com](https://parts.agcocorp.com)



Ask your dealer about AGCO Protection, an extended warranty program that prolongs your coverage and safeguards against the cost of sudden breakdowns.

AGCO replacement parts are made to the same high standards as those used on the assembly line, so your AGCO equipment will stay running like new. Talk to your dealer or shop at [parts.agcocorp.com](https://parts.agcocorp.com) to find the genuine AGCO parts you need.

Focus on your operation, not on scheduling maintenance. With AGCO GenuineCare plans, your service intervals are predetermined. You'll avoid downtime and be able to better plan your costs thanks to transparent pricing, bundles and discounts.

# TECHNICAL SPECIFICATIONS

| <b>MODEL</b>                    |                      | <b>1526</b>                      |
|---------------------------------|----------------------|----------------------------------|
| <b>Engine</b>                   |                      |                                  |
| Rated engine power              | HP (kW)              | 24.8 (18.5)                      |
| PTO power                       | HP (kW)              | 20.1 (15)                        |
| Rated engine speed              |                      | 2,600                            |
| Engine type                     |                      | 3-cylinder diesel                |
| Displacement                    | in. <sup>3</sup> (L) | 91.4 (1.5)                       |
| Cooling system                  |                      | Liquid cooled                    |
| Fuel tank capacity              | gal. (L)             | 7.1 (27)                         |
| <b>Transmission</b>             |                      |                                  |
| Hydrostatic ranges              |                      | 3 with cruise                    |
| Rear brakes                     |                      | Wet, multiple disc               |
| <b>PTO</b>                      |                      |                                  |
| Rear PTO type                   |                      | Independent 540 RPM              |
| Control                         |                      | Electrohydraulic                 |
| Mid PTO type – Opt.             |                      | Independent 2000 RPM             |
| <b>Hydraulics</b>               |                      |                                  |
| Type of system                  |                      | Open center                      |
| Flow at remotes                 | gpm (LPM)            | 5.5 (20.9)                       |
| Power steering flow             | gpm (LPM)            | 3.2 (12.3)                       |
| Total flow                      | gpm (LPM)            | 8.7 (33.2)                       |
| Rear remote valves              |                      | 1 opt.                           |
| <b>3-Point Hitch</b>            |                      |                                  |
| ASAE hitch                      |                      | Cat. 1                           |
| Position control                |                      | Std.                             |
| Rate of drop control            |                      | Std.                             |
| Lift capacity @ hitch point     | lbs. (kg.)           | 1,322 (600)                      |
| Lift capacity @ 24" behind      | lbs. (kg.)           | 992 (450)                        |
| <b>Operator Area</b>            |                      |                                  |
| Platform type                   |                      | Semi-flat with rubber mat        |
| ROPS type                       |                      | Foldable                         |
| Seat type                       |                      | Adjustable mechanical suspension |
| <b>Dimensions With R4 Tires</b> |                      |                                  |
| Overall length                  | in. (mm)             | 111 (2,820)                      |
| Min. overall width              | in. (mm)             | 55.1 (1,400)                     |
| Max. height over ROPS           | in. (mm)             | 96.1 (2,440)                     |
| Ground clearance                | in. (mm)             | 11.6 (295)                       |
| Wheelbase                       | in. (mm)             | 61.4 (1,560)                     |
| Base weight                     | lbs. (kg.)           | 2,077 (942)                      |



| <b>Loader</b>                                |                  | <b>FLx2106</b>   |
|--|------------------|------------------|
| Max. lift height @ pivot pin                 | in. (mm)         | 83 (2,108)       |
| Dump angle                                   |                  | 42°              |
| Rollback angle                               |                  | 31°              |
| Lift capacity to full height @ 19.5" forward | lbs. (kg.)       | 852 (386)        |
| Breakout force @ 19.5" forward               | lbs. (kg.)       | 1,282 (582)      |
| Bucket width                                 | in. (mm)         | 54               |
| <b>Mid-Mount Mower</b>                       |                  | <b>1505</b>      |
| Discharge type                               |                  | Right side       |
| Cutting width                                | in. (mm)         | 60 (1,524)       |
| Cutting height                               | in. (mm)         | 1.5-4.0 (38-102) |
| Number of blades                             |                  | 3                |
| Max blade tip velocity                       | ft/sec. (m/sec.) | 320.2 (97.6)     |

\*Specifications are manufacturer's estimates at time of publication and are subject to change without prior notification.




We proudly support:





**APPLY  
ONLINE**  
FOR FINANCING



APPLY NOW FOR PRE-APPROVAL\*  
[www.masseyferguson.us](http://www.masseyferguson.us)



or scan the QR code to get started.



\*Currently only available for individual applicants. Subject to credit review and approval and other terms and conditions. All financing is in AGCO Finance LLC's sole discretion.  
©2023 AGCO Corporation. Massey Ferguson is a worldwide brand of AGCO Corporation.  
AGCO and Massey Ferguson are trademarks of AGCO. All rights reserved. 1 MF23B004FOV02



**MASSEY FERGUSON**

BORN TO **FARM**